

# **DYNADRUM<sup>®</sup> DU55 SERIES HOT MELT DRUM UNLOADER**



## ***The Dynatec Advantage***


- ***DYNACONTROL™ digital, multilingual microprocessor temperature control***
- ***18,000 watt or 21,000 watt teflon® coated platen***
- ***Positive displacement gear pump***
- ***Drum empty pump shut-off***
- ***Fully enclosed pneumatic controls***
- ***1 HP AC brushless variable pump drive***
- ***6.5" dual post pneumatic ram***
- ***1 or 2 hose configuration***
- ***Options include drip tray, low level warning light, three point level control and fill ball valve***

**hma systems**

Adhesive Application Specialists

**1-800-309-2880**

# DYNADRUM® DU55 SERIES DRUM UNLOADER SPECIFICATIONS

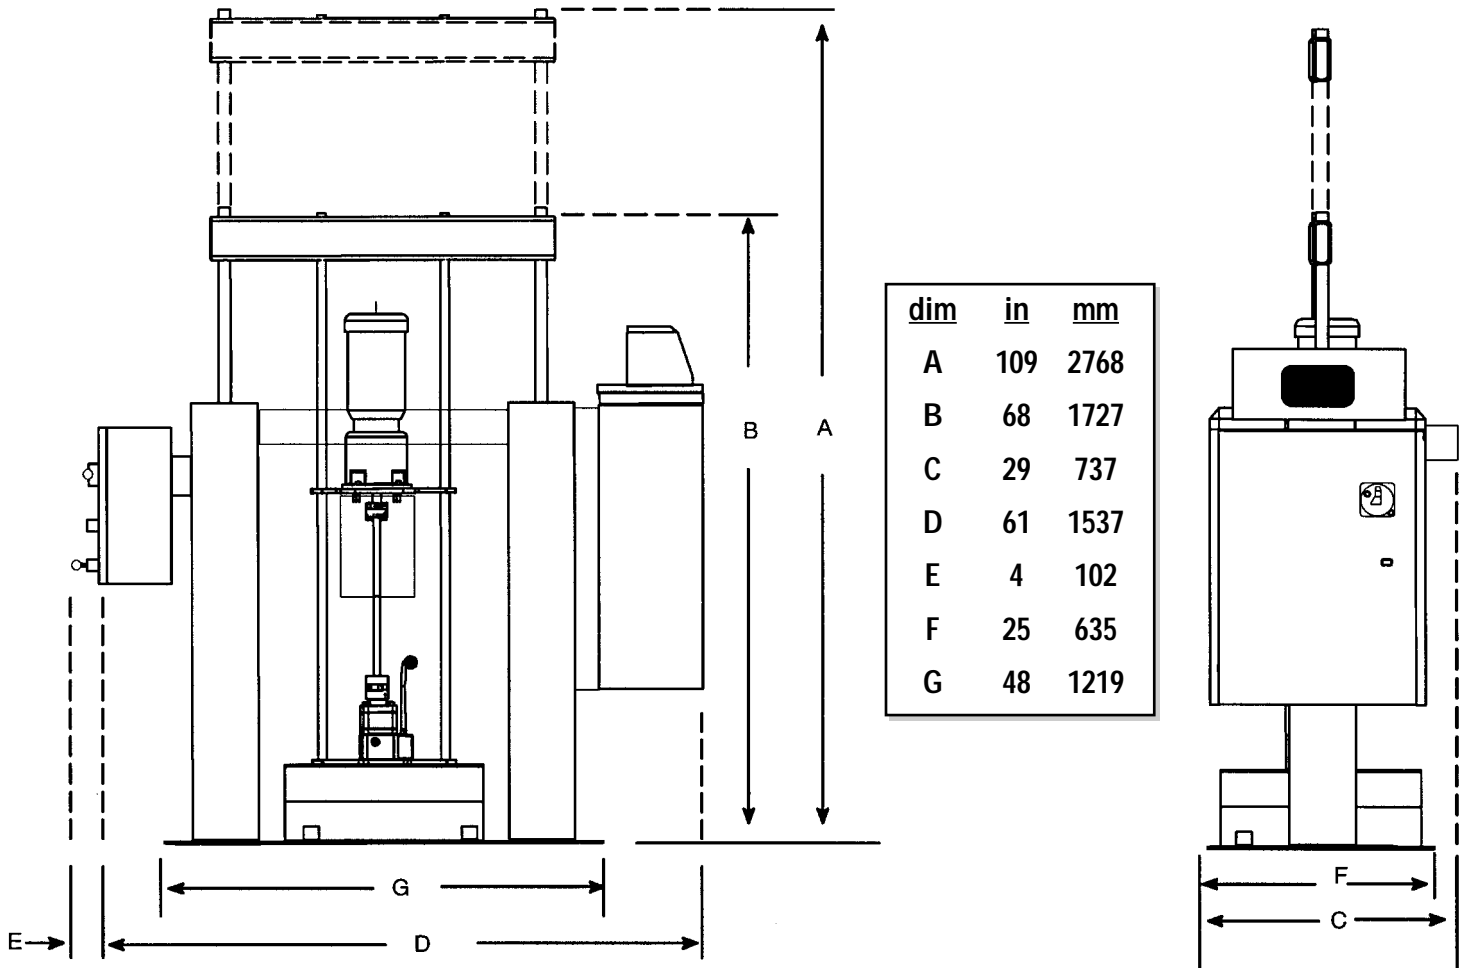

dim	in	mm
A	109	2768
B	68	1727
C	29	737
D	61	1537
E	4	102
F	25	635
G	48	1219

**Melt Rate**

DU553	300lb/hr*
DU554 Hi-Flo	400lb/hr*

\*Based on 4,000 cps PSA hot melt

**Pump Output**

DU553	350 lb/hr*
DU554 Hi-Flo	530 lb/hr*

\*Pump Drive 1hp AC Variable Speed (brushless)

**Pump Rate**

DU553	30 cc/rev
DU554 Hi-Flo	45 cc/rev
Optional	20 cc/rev

**Watts**

DU553	18,000
DU554 Hi-Flo	21,000
Hose Manifold	800
Hose (24') #12 (.625)	1,440
Control Panel	200
Maximum Wattage	50,000

**Voltage**

240, 3 Ph  
 480, 3 Ph  
 Requires 100 AMP Service

**hma systems**

Adhesive Application Specialists



**HMA Systems**  
 Unit 12 - 185 Advance Blvd  
 Brampton, Ont, L6T 4Y3  
 Tel: 905-458-8182  
 Fax: 905-458-0758

**1-800-309-2880**