

TPC-1 Adhesive Pattern Controller



The HMA Advantage

- *Exceptional Value for Controlling Packaging Machine Adhesive Patterns*
- *Hot-Melt or Cold Glue Pneumatic Valve Compatible*
- *Test Mode and Manual Mode for Maintenance and Troubleshooting*
- *24 VDC or 115 VAC Solenoid Valve Output*


hma systems

Adhesive Application Specialists

TPC-1 Adhesive Pattern Controller

**Configuration
(at right) and
Dimensions
(at bottom)**

TPC-1
Pattern Controller
(111168, 24VDC output)
(111304, 115VAC output)

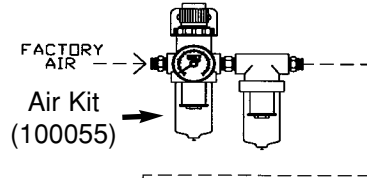

Input Power
115 VAC


Photo Eye
(033X153)

Solenoid
(As Required)

Hot Melt Applicator
(As Required)

Hot Melt Unit
(As Required)

Hot Melt Hose
(As Required)

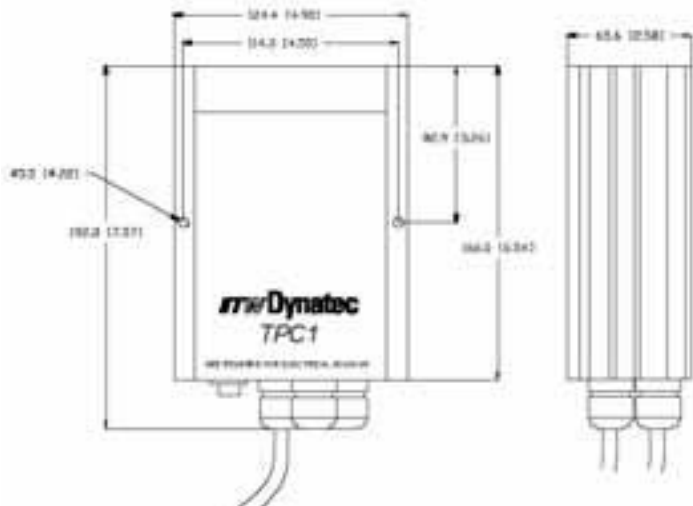

■ **Hot Melt or
Cold Glue
System
Compatible**

■ **Electric or
Pneumatic
Applicator
Compatible**

hma systems

Adhesive Application Specialists

1-800-309-2880

HMA Systems
Unit 12 - 185 Advance Blvd
Brampton, Ont, L6T 4Y3
Tel: 905-458-8182
Fax: 905-458-0758